

SUPERIOR TRAMWAY CO, INC.

P.O. BOX 18066 SPOKANE, WA 99228


(509) 483-6181 FAX (509) 483-0948

E-MAIL: AERSUPTRM@AOL.COM

A0907D 20-Ton Rigging Blocks

FEATURES

1. 58 lbs per block
2. Use with 9/16" or 5/8" wire rope.
3. High strength alloy pins.
4. High strength alloy side plates.
5. (3) - 8" Ø sheaves.
6. Roller bearings in sheaves.
7. Sheave bearings can be greased without disassembly.
8. Use with 25 ton screw pin shackles.

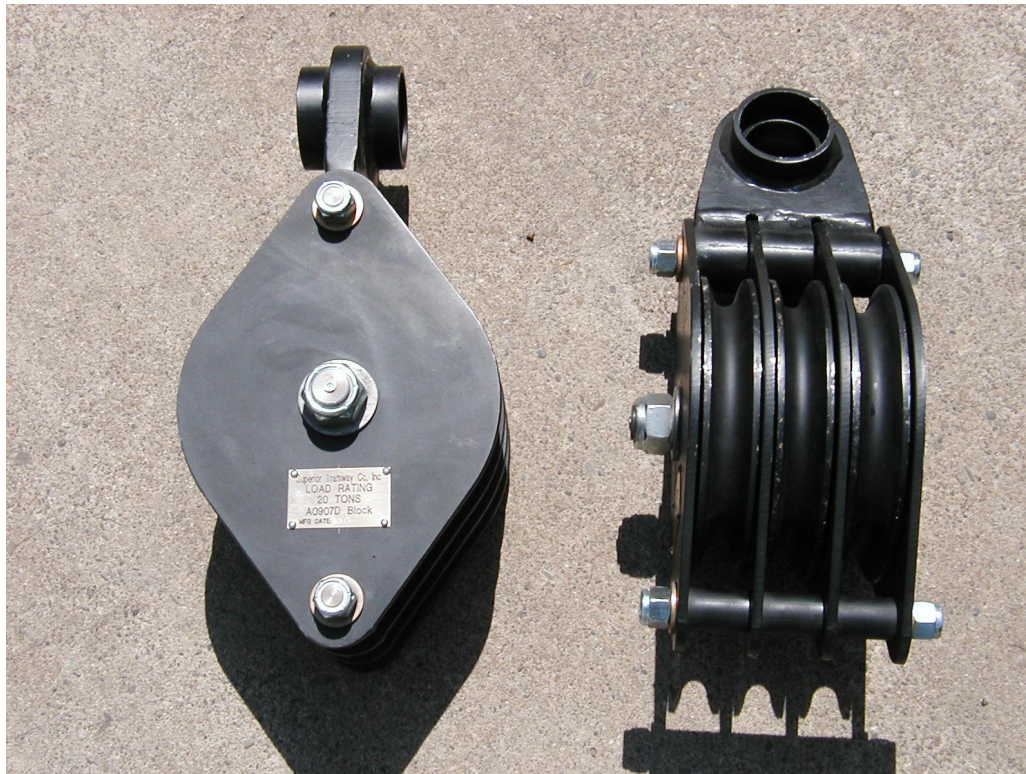

Quality Tramway Equipment